### W54-XB1A4A10-20 - ACTIVE

#### Potter & Brumfield W54

TE Internal #: 1423674-9 Circuit Breakers, Thermal, Series Trip, White, Operating Voltage 250 VAC, Operating Voltage 50 VDC, 20A Current Rating, 1 Pole, Potter & Brumfield W54

View on TE.com >

Relays & Contactors > Circuit Breakers



#### Circuit Breaker Type: Thermal

Circuit Function: Series Trip

Illuminated: Without

Actuator Color: White

Operating Voltage: 250 VAC

#### Features

#### **Product Type Features**

Illumination Type	No Light
Actuator Type	Push to Reset
Circuit Breaker Type	Thermal



Illuminated		luminated
-------------	--	-----------

**Configuration Features** 

#### Without

Panel Cutout Size11.2 x 10.01 mm[.441 x .394 in]Circuit FunctionSeries TripNumber of Poles1Electrical Characteristics50 VDCOperating Voltage50 VDCCurrent Rating20 AInterrupt Capacity1000A @ 250VAC/50VDCBody FeaturesVhiteContact FeaturesTrip Time at 200%Termination Features5 – 30 secondsTerminal Configuration6.35 [.25] Straight Quick Connect Tab	een ig al allow i ea cal ee	
Number of Poles 1   Number of Poles 1   Electrical Characteristics 50 VDC   Operating Voltage 50 VDC   Current Rating 20 A   Interrupt Capacity 1000A @ 250VAC/50VDC   Body Features Vhite   Contact Features 5 – 30 seconds   Trip Time at 200% 5 – 30 seconds	Panel Cutout Size	11.2 x 10.01 mm[.441 x .394 in]
Electrical Characteristics   Operating Voltage 50 VDC   Current Rating 20 A   Interrupt Capacity 1000A @ 250VAC/50VDC   Body Features Vhite   Actuator Color White   Cortact Features 5 – 30 seconds   Trip Time at 200% 5 – 30 seconds	Circuit Function	Series Trip
Operating Voltage50 VDCCurrent Rating20 AInterrupt Capacity1000A @ 250VAC/50VDCBody FeaturesVActuator ColorWhiteContact Features5 – 30 secondsTrip Time at 200%5 – 30 seconds	Number of Poles	1
Current Rating 20 A   Interrupt Capacity 1000A @ 250VAC/50VDC   Body Features Value   Actuator Color White   Contact Features 5 – 30 seconds   Trip Time at 200% 5 – 30 seconds	Electrical Characteristics	
Interrupt Capacity 1000A @ 250VAC/50VDC   Body Features Vhite   Actuator Color White   Contact Features 5 – 30 seconds   Trip Time at 200% 5 – 30 seconds	Operating Voltage	50 VDC
Body Features   Actuator Color White   Contact Features   Trip Time at 200% 5 – 30 seconds   Termination Features	Current Rating	20 A
Actuator ColorWhiteContact FeaturesS – 30 secondsTrip Time at 200%S – 30 secondsTermination FeaturesS – 30 seconds	Interrupt Capacity	1000A @ 250VAC/50VDC
Contact Features   Trip Time at 200% 5 – 30 seconds   Termination Features	Body Features	
Trip Time at 200%5 – 30 secondsTermination Features	Actuator Color	White
Termination Features	Contact Features	
	Trip Time at 200%	5 – 30 seconds
Terminal Configuration 6.35 [.25] Straight Quick Connect Tab	Termination Features	
	Terminal Configuration	6.35 [.25] Straight Quick Connect Tab

**C** For support call+1 800 522 6752

#### W54-XB1A4A10-20

Circuit Breakers, Thermal, Series Trip, White, Operating Voltage 250 VAC, Operating Voltage 50 VDC, 20A Current Rating, 1 Pole, Potter & Brumfield W54



#### **Mechanical Attachment**

Mounting Hardware Packaging

Mounting Bushing

Mounting Options

**Identification Marking** 

Stamped Marking Type

**Product Compliance** 

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC

Assembled to Bushing

Knurled Nut/Hex Nut

Amp Rate Marking

9.8 x 12.6mm Long, Metal

Free

#### Solder Process Capability

#### Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

### **Compatible Parts**

#### W54-XB1A4A10-20

Circuit Breakers, Thermal, Series Trip, White, Operating Voltage 250 VAC, Operating Voltage 50 VDC, 20A Current Rating, 1 Pole, Potter & Brumfield W54






# Also in the Series | Potter & Brumfield W54



# Customers Also Bought

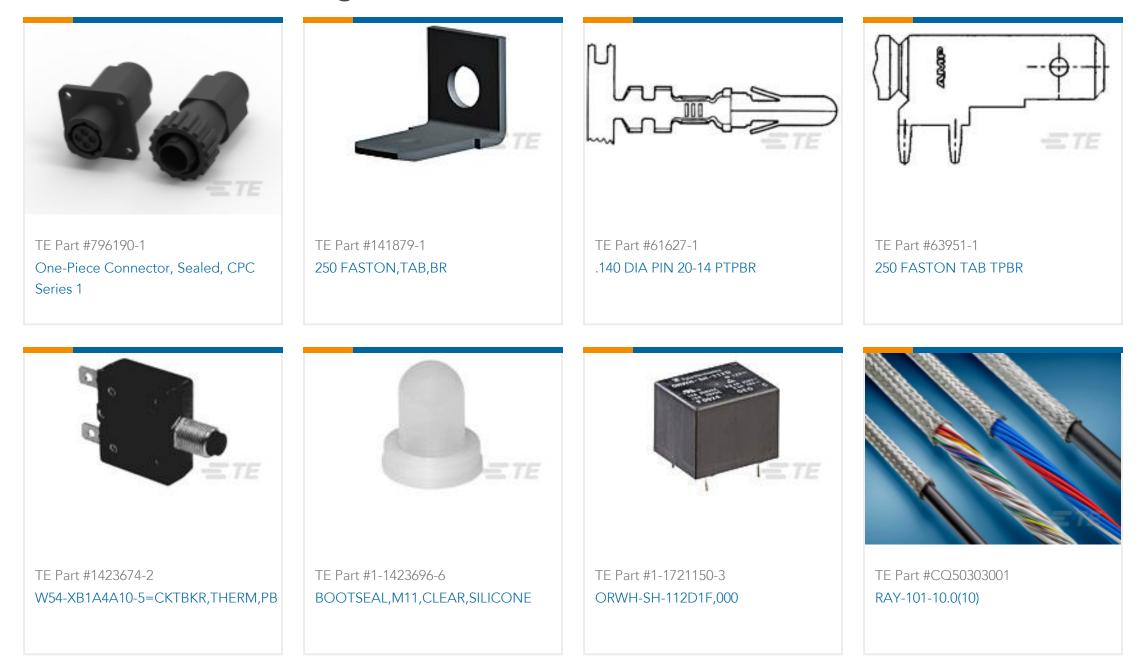



#### W54-XB1A4A10-20

Circuit Breakers, Thermal, Series Trip, White, Operating Voltage 250 VAC, Operating Voltage 50 VDC, 20A Current Rating, 1 Pole, Potter & Brumfield W54



### Documents

CAD Files Customer View Model ENG\_CVM\_1423674-9\_1108.3d\_igs.zip English Customer View Model ENG\_CVM\_1423674-9\_1108.3d\_stp.zip English Customer View Model ENG\_CVM\_1423674-9\_1108.2d\_dxf.zip English

3D PDF

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages W54 Push To Reset Only Thermal Circuit Breaker

English

Agency Approvals CCC Certificate

English